


Chartwell Ceiling Drum

Crenshaw Catalog



Non-IC rated recessed ballast enclosure for CF dimming 8" x 8" x 3" high. UL/CSA dry or damp location.

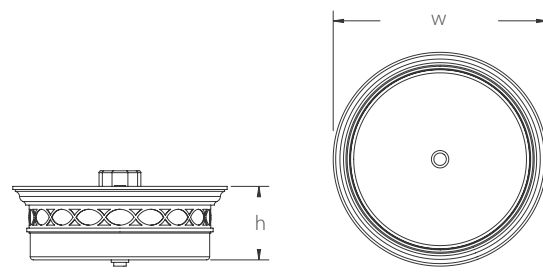

Chartwell Ceiling Drum # CES 8351, 8352

Lamping Finishes Lenses Specify

FINISHES

Painted - PT
 Premium Painted - PTP
 Satin Brass - SB
 Polished Brass - PB
 Bronze Lacquer - BQ
 Antique Brass - AB
 Aged Brass - AGB
 Antique Bronze - ABZ
 Oil-Rubbed Bronze - ORB

CES 8351

17-1/2" w x 6-1/2" h

LA: CLED-3000 (42W, 3,000 lum, 3000K)
 LA-D: CLED-3000 (42W, 3,000 lum, 3000K) 0-10V dim
 or CLED-3000-PC (42W, 3,000 lum, 3000K) phase control (LE) dim
 or CLED-3000-L3 (42W, 3,000 lum, 3000K) Lutron 3-wire or EcoSystem 1% dim
 FA: (2) 26W TBX CFL
 FA-D: (2) 26W TBX CFL Adv Mark X dim (semi-recessed)
 NA: (2) 40W A19 equivalent

CES 8352

21-1/2" w x 8" h

LA: CLED-3000 (42W, 3,000 lum, 3000K)
 LA-D: CLED-3000 (42W, 3,000 lum, 3000K) 0-10V dim
 or CLED-3000-PC (42W, 3,000 lum, 3000K) phase control (LE) dim
 or CLED-3000-L3 (42W, 3,000 lum, 3000K) Lutron 3-wire or EcoSystem 1% dim
4,000 lum LED in development
 FA: (2) 32W TBX CFL
 FA-D: (2) 32W TBX CFL Adv Mark X dim (semi-recessed)
 NA: (2) 60W A19 equivalent

LENSES

White Acrylic - WA

