


Contemporary Simple Forms Pendant

Crenshaw Catalog



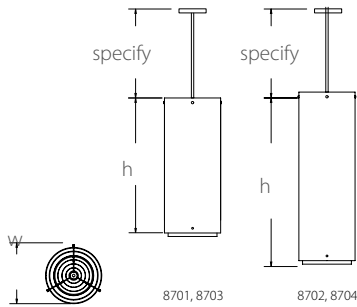

Contemporary Simple Forms Pendant

Crenshaw Catalog

Provided with up to 10 ft suspension stem, cut to specification, with canopy and hardware suitable for mounting to a flat or angled ceiling. UL/CSA dry or damp location.



Contemporary Simple Forms Pendant # PES 8701, 8702, 8703, 8704

[Lamping](#)
[Finishes](#)
[Lenses](#)
[Specify](#)

FINISHES

Painted - PT
 Premium Painted - PTP
 Satin Brass - SB
 Polished Brass - PB
 Bronze Lacquer - BQ
 Antique Brass - AB
 Aged Brass - AGB
 Antique Bronze - ABZ
 Oil-Rubbed Bronze - ORB

PES 8701

10" w x 24" h, specify suspension

LD: 12LED (158W, 16,000 lum, 3000K, 28" body ht)
 LD-D: 12LED 0-10V dim (170W, 17,300 lum, 3000K, 28" body ht)
 or 12LED-PC phase control dim (166W, 16,900 lum, 3000K, 28" body ht)
 FLED: (4) 39W BX CFL + (1) 50W LED (COB 4,400 lum, 3000K)
 FLED-D: (4) 39W BX CFL non-dim + (1) 62W LED (COB 5,700 lum, 3000K) 0-10V dim
 FA: (4) 39W BX CFL
 FA-D/FD/FD-D: not available
 NA: (6) 75W A19 equivalent
 ND: (6) 75W A19 + (1) 300W R40 equivalent

PES 8702

10" w x 32" h, specify suspension

LD: *see PES 8701*
 FLED: (4) 40W BX CFL + (1) 50W LED (COB 4,400 lum, 3000K)
 FLED-D: (4) 40W BX CFL non-dim + (1) 62W LED (COB 5,700 lum, 3000K) 0-10V dim
 FA: (4) 40W BX CFL
 FD: (4) 40W BX CFL + (1) 300W R40 equivalent
 FA-D/FD-D: not available
 NA: (6) 75W A19 equivalent
 ND: (6) 75W A19 + (1) 300W R40 equivalent

LENSES

White Acrylic - WA

PES 8703

12" w x 28" h, specify suspension

LD: 12LED (158W, 16,000 lum, 3000K)
 LD-D: 12LED 0-10V dim (170W, 17,300 lum, 3000K)
 or 12LED-PC phase control dim (166W, 16,900 lum, 3000K)
 FLED: (4) 40W BX CFL + (1) 50W LED (COB 4,400 lum, 3000K)
 FLED-D: (4) 40W BX CFL + (1) 62W LED (COB 5,700 lum, 3000K) 0-10V dim
 FA: (4) 39W BX CFL
 FA-D: (4) 39W BX CFL Adv Mark X dim
 FD: (4) 39W BX CFL + (1) 300W R40 equivalent
 FD-D: (4) 39W BX CFL + (1) 300W R40 equivalent Adv Mark X dim
 NA: (6) 75W A19 equivalent
 ND: (6) 75W A19 + (1) 300W R40 equivalent

PES 8704

12" w x 36" h, specify suspension

LD: 18LED (198W, 21,800 lum, 3000K, 39" body ht)
 LD-D: 18LED 0-10V dim (210W, 23,000 lum, 3000K, 39" body ht)
 FLED: (4) 40W BX CFL + (1) 50W LED (COB 4,400 lum, 3000K)
 FLED-D: (4) 40W BX CFL + (1) 62W LED (COB 5,700 lum, 3000K) 0-10V dim
 FA: (4) 40W BX CFL
 FA-D: (4) 40W BX CFL Adv Mark X dim
 FD: (4) 40W BX CFL + (1) 300W R40 equivalent
 FD-D: (4) 40W BX CFL Adv Mark X dim + (1) 300W R40 equivalent
 NA: (6) 100W A19 equivalent
 ND: (6) 100W A19 + (1) 300W R40 equivalent

